
# ShawContract<sup>®</sup>


# Solitude

CollectionSolitudeStyle Number0648VConstructionHeavy Commercial Luxury Vinyl Tile With FiberglassClass / ASTM F1700Class III, Type BFinishExoGuard®U.s.MetricNominal Dimensions6 in w x 48 in I15 cm w x 122 cm IActual Dimensions6.00 in w x 48.00 in I15.24 cm w x 121.92 cm IWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommended Adhesive\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151Packaging			
ConstructionHeavy Commercial Luxury Vinyl Tile With FiberglassClass / ASTM F1700Class III, Type BFinishExoGuard®U.s.MetricNominal Dimensions6 in w x 48 in lActual Dimensions6.00 in w x 48.00 in lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm IMetric20 mil (0.02 in)Overall Thickness0.197 inEdge ProfileSquared EdgeInstallationDirect GlueRecommended Adhesive\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Collection	Solitude	
FiberglassClass / ASTM F1700Class III, Type BFinishExoGuard®U.s.MetricNominal Dimensions6 in w x 48 in l15 cm w x 122 cm lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallationDirect GlueRecommended\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Style Number	0648V	
FinishExoGuard®U.s.MetricNominal Dimensions6 in w x 48 in l15 cm w x 122 cm lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallationDirect GlueRecommended\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Construction		
Lice dual deU.s.MetricNominal Dimensions6 in w x 48 in l15 cm w x 122 cm lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommended\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Class / ASTM F1700	Class III, Type B	
Nominal Dimensions6 in w x 48 in l15 cm w x 122 cm lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommended\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Finish	ExoGuard®	
Actual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lActual Dimensions6.00 in w x 48.00 in l15.24 cm w x 121.92 cm lWear Layer Thickness20 mil (0.02 in)0.51 mmOverall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommended\$150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151		U.s.	Metric
Wear Layer Thickness 20 mil (0.02 in) 0.51 mm   Overall Thickness 0.197 in 5 mm   Edge Profile Squared Edge   Installation Type Dry Back   Installation Direct Glue   Recommended S150-95, LOKWORX+ RESILI, LOKWORX+   Adhesive S150.95, LOKWOrx Resilient, SHAW 4100 or 4151	Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Overall Thickness0.197 in5 mmEdge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommendedS150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Actual Dimensions	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Edge ProfileSquared EdgeInstallation TypeDry BackInstallationDirect GlueRecommendedS150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Installation TypeDry BackInstallationDirect GlueRecommendedS150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Overall Thickness	0.197 in	5 mm
InstallationDirect GlueRecommendedS150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Edge Profile	Squared Edge	
Recommended AdhesiveS150-95, LOKWORX+ RESILI, LOKWORX+ RESILI, LokWorx Resilient, SHAW 4100 or 4151	Installation Type	Dry Back	
Adhesive RESILI, LokWorx Resilient, SHAW 4100 or 4151	Installation	Direct Glue	
Packaging			
0 0	Packaging		

Pieces Per Carton	10 pcs	
Area Per Carton	20 sq ft	1.86 sq m
Weight Per Carton	35.1 lbs	15.92 kg

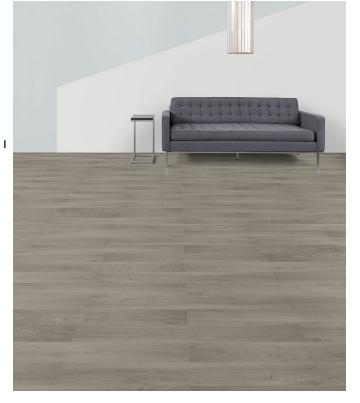

# Recommended Installation Method



### Performance + Testing

Residual Indentation (Astm F1914)	Passes
Resistance To Heat (Astm F1514)	Passes
Resistance To Light (Astm F1515)	Passes
Resistance To Chemicals (Astm F925)	Passes
Smoke Density (Astm E662, Flaming Mode)	Passes
Coefficient Of Friction (Astm D2407, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
	Test Dependences provide included as listed by the many fact wind from the test

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

15 Year Commercial Limited

Commercial Limited Underbed Bond Shaw 4100, S150 Or Shaw 4151

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miam) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2023 Shaw Industries Group, Inc., a Berkshire Hathaway Company January 11, 2023

1 of 2

# ShawContract<sup>®</sup>

Diversity, Equity & Conclusion

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

#### Material Health & Environmental Certifications

#### Health & Wellbeing

Material Ingredient Transparency

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

Global Product Assessment

Health Product Declaration (HPD) | 100 ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:20170% (Pre-Consumer 0% | Post-Consumer 0%)

FloorScore® | Certified CE Marking (EN 14041) | 3rd Party Certified Country of Origin | Imported

# Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration EQ Credit: Low Emitting Materials Option 1: Product Category Calculations

Installation Guidelines Maintenance Guidelines

#### RFCi Industry Average EPD (50%)

#### FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Solitude







Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miam) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2023 Shaw Industries Group, Inc., a Berkshire Hathaway Company January 11, 2023

2 of 2