

## Compound 2.5 Mm


Collection	<b>Compound + Cast</b>	
Style Number	<b>4074V</b>	
Construction	<b>Heavy Commercial Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III, Type B</b>	
Finish	<b>ExoGuard+®</b>	
	U.s.	Metric
Nominal Dimensions	<b>24 in w x 24 in l</b>	<b>61 cm w x 61 cm l</b>
Actual Dimensions	<b>24.00 in w x 24.00 in l</b>	<b>60.96 cm w x 60.96 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Squared Edge</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Recommended Adhesive	<b>LG4100 4G, LOKWORX+ RESILI, 4151, S150-95 or LOKWORX+ RESILI</b>	

### Packaging

Pieces Per Carton	<b>17 pcs</b>	
Area Per Carton	<b>68 sq ft</b>	<b>6.32 sq m</b>
Weight Per Carton	<b>54 lbs</b>	<b>24.49 kg</b>



### Recommended Installation Method

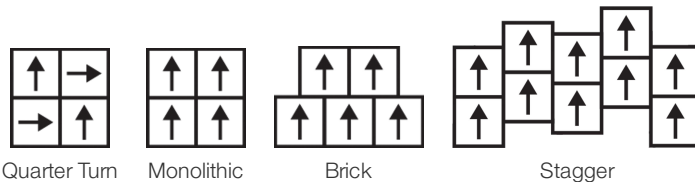

### Coordinating Products

LVT: Compound 5.0, Cast 2.5 Mm, Cast 5.0 Mm

### Performance + Testing

Residual Indentation (Astm F1914)	<b>Passes</b>
Resistance To Heat (Astm F1514)	<b>Passes</b>
Resistance To Light (Astm F1515)	<b>Passes</b>
Resistance To Chemicals (Astm F925)	<b>Passes</b>
Smoke Density (Astm E662, Flaming Mode)	<b>Passes</b>
Coefficient Of Friction (Astm D2407, Slip Resistance)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[15 Year Commercial Limited](#)

[Commercial Limited Underbed Bond Shaw 4100, S150 Or Shaw 4151](#)

## Diversity, Equity & Conclusion

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

### Climate Impact

Environmental Product Declaration (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

Total Recycled Content

30% (Pre-Consumer 30% | Post-Consumer 0%)

### Global Product Assessment

[FloorScore® | Certified](#)

CE Marking (EN 14041) | 3rd Party Certified

Country of Origin | United States

## Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

[Installation Guidelines](#)

[Maintenance Guidelines](#)

### RFCi Industry Average EPD (50%)

### FloorScore Certified

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

