

BAMBOO



- Klump scratch resistant water based matte coating.
- 3 mm Wear Layer will perform the same as solid equivalent. Can be sanded & recoated in the future if required.
- Cross-layered plywood core for optimal stability.
- Patented click system for easy install.

Verdura X
Engineered Bamboo

TECHNICAL SPECIFICATIONS

Dimensions

1850mm x 142mm x 14mm

Profile

Micro-bevel 4 sides, Patented locking system for floating installation

Hardness

Strand woven bamboo approx. Janka scale 15kN


Coating

8 Layer process, Klumpp water based matte finish

VOC Emissions E1

Compliance


Australian fire & slip test certified

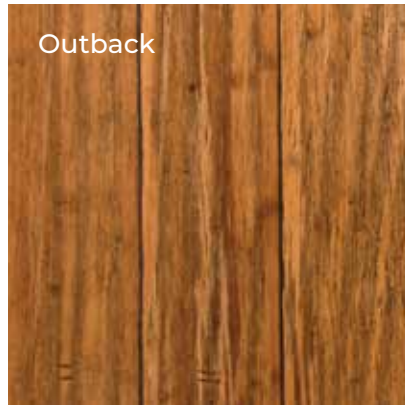

Outback




UV Matte Finish
Hand Scraped
Easy Click Lock

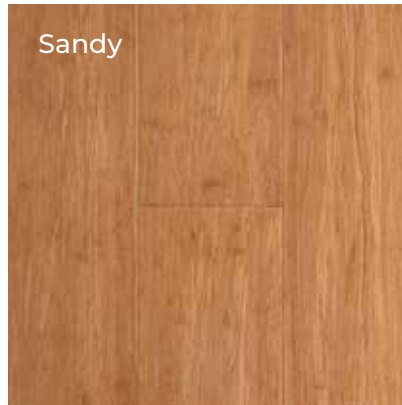

Sandy



UV Matte Finish
Easy Click Lock

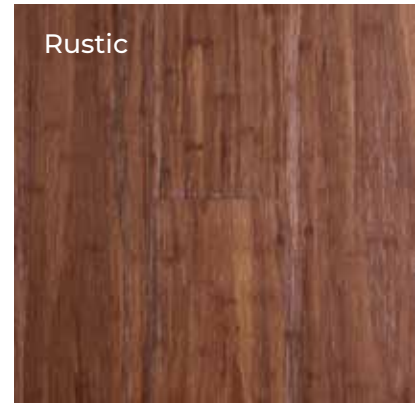

Rustic




UV Matte Finish
Brushed Surface
Easy Click Lock



Australiana




UV Matte Finish
High Contrast
Easy Click Lock

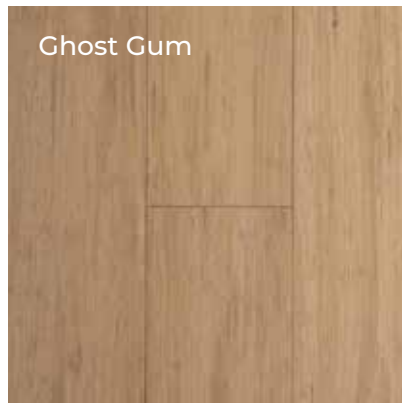

Ghost Gum



UV Matte Finish
Brushed Surface
Easy Click Lock
Lime Brushed

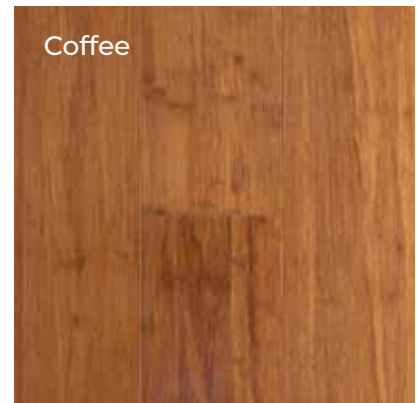

Coffee



UV Matte Finish
Easy Click Lock

Reseller Enquiries

SA - Adelaide

t +61 8 8262 2774

sa@preferencefloors.com.au

QLD - Brisbane

t +61 7 3875 1688

qld@preferencefloors.com.au

VIC - Melbourne

t +61 3 9794 5111

vic@preferencefloors.com.au

WA - Perth

t +61 8 9471 7785

wa@preferencefloors.com.au

NSW - Sydney

t +61 2 9738 1188

sales@preferencefloors.com.au